



GSV2002

2 In to 2 Out HDMI2.0 Repeater with Audio
Extraction/Insertion

August, 2018

PRODUCT SPECIFICATION

ONWA

1 General Information

1.1 General Information

The GSV2002 is HDMI1.4/2.0 compatible, HDCP 1.4/2.2 supported, configurable 2-in-2-out repeater device. All 2 inputs are identical on receiver capability and all 2 outputs are identical on transmitter capability. GSV2002 is always in 1-in-2-out mode, the distributed video stream can be selected as either one of the 2 inputs.

The HDMI input and output maximum processing pixel clock frequency is 600MHz which means the video resolution can support up to 4kx2k@60Hz 4:4:4 8-bit. The maximum processing audio sample frequency is 192K Hz for non-compression timing. GSV2002 supports HDR10 and Dolby Vision HDR as input and output.

For audio insertion and extraction, the versatile TTL pin bus of GSV2002 can be configured as either input mode or output mode regarding platform requirement. GSV2002 can support up to 8-channel I2S or 2-channel S/PDIF, 3D and multi-stream audio. In TDM mode, each audio pin supports up to 8 channels.

Internal Scaler and Color Space Converter enables the input and output to be timing format independent and capable of long distance transmission.

With powerful HDMI Rx equalizer and Tx pre-emphasis capability, GSV2002 can cascade itself (or GSV2000 series chips) with at least 7 stages for all HDMI 1.3/1.4/2.0 timings.


1.2 Features

1.2.1 HDMI Video Input and Output

- Compliant with HDMI2.0b, HDMI1.4b
- Compliant with HDCP2.2/2.3 and HDCP1.4
- Data rate up to 18Gbps
- Programmable HDMI Tx output swing, slew-rate, pre-emphasis
- Adaptive receiver equalization
- AC-coupling capable
- Color Space Converter supports any conversion between different color spaces
- HDR supported (HDR10/HDR12/Dolby Vision/HLG)
- 5V tolerance on DDC/HPD/CEC
- Arbitrary video stream matrix between HDMI Rx and HDMI Tx

1.2.2 Audio Input/Output

- SPDIF/I2S/HBR/DSD/TDM Audio Extraction
- SPDIF/I2S/HBR/DSD/TDM Audio Insertion
- Configurable direction for each Audio bus
- Arbitrary audio stream matrix between HDMI Rx/HDMI Tx/Audio bus

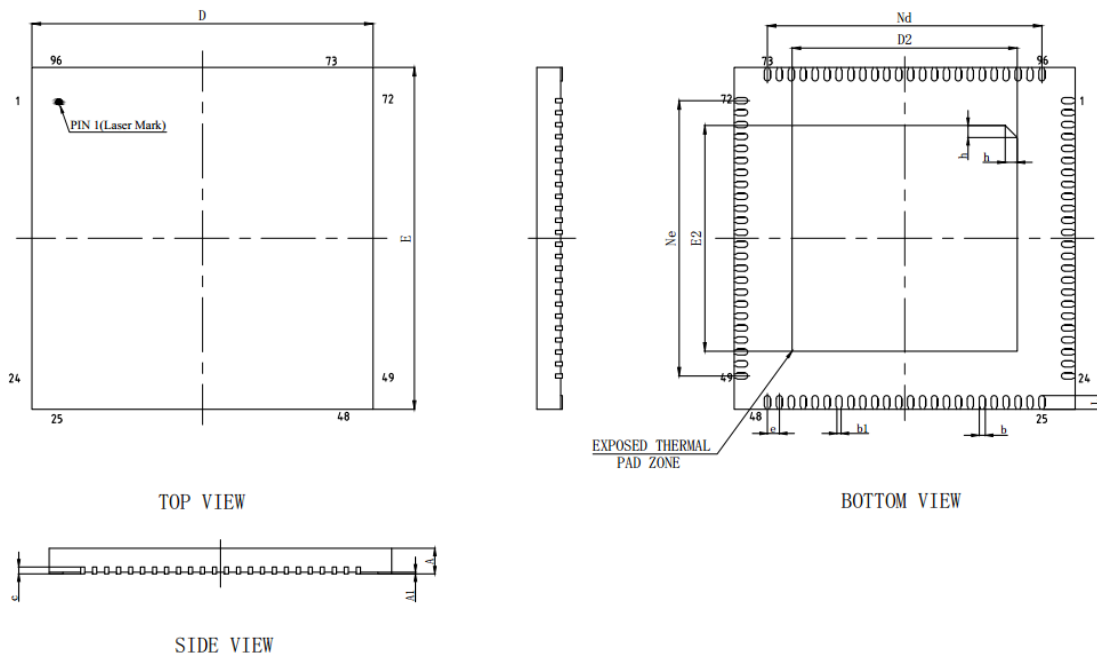

TOP VIEW

BOTTOM VIEW

SIDE VIEW

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0	0.02	0.05
b	0.13	0.18	0.23
b1	0.12REF		
c	0.18	0.20	0.25
D	9.90	10.0	10.10
D2	6.50	6.60	6.70
e	0.35BSC		
Nd	8.05BSC		
E	9.90	10.0	10.10
E2	6.50	6.60	6.70
Ne	8.05BSC		
L	0.35	0.40	0.45
h	0.30	0.35	0.40

Figure 9. GSV2002 package dimensions

5 Ordering Guide

Table 10. Ordering Information

Part Number.	Temperature Range	Package Description	Packing Type
GSV2002	-20 °C to +85 °C	QFN96L, 0.35 mm ball pitch, 10 mm x 10 mm outline	Tray

The ONWAY logo is a stylized, light blue, sans-serif font. The letter 'O' is a circle with a white dot in the center. The letters 'N', 'W', 'A', and 'Y' are solid blue. The logo is tilted diagonally upwards from left to right.